




## On/Off-Grid Mini-Inverter for Grid AC or Heating – Twin Pack



- On-Grid or Off-Grid Mode
- Specially Designed for Powering Electric Water Heaters or Heating Elements in Off-Grid Mode
- Total 8 DC Input Channels for 8 Solar Panels with MPPT
- Heat Water or Send Power to the Grid Based on Demand
- Outdoor or Indoor Mounting
- High Efficiency and Long Life
- Much Easier to Install than Thermal Solar Water Heaters

One Master (CIM-1200A/H1) & one Slave (CIM-1200A/H2) On/Off-Grid CyboInverter can daisy-chain, and produce up to 2500W, 240V, 60Hz AC to the grid through its A Port in on-grid mode, or power 2000W-4000W heating elements or resistive loads through its H Output Port in off-grid mode.

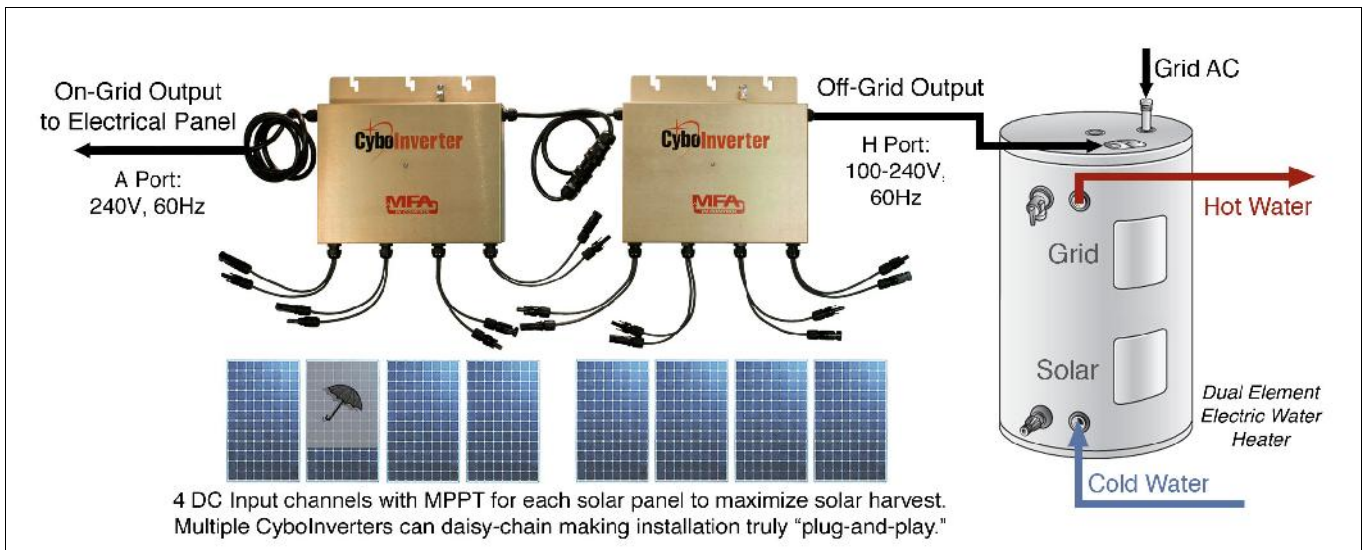

**Product: On/Off-Grid CyboInverter A/H Twin Pack (Total 8 Input Channels)**  
**PN: CIM-1200A/H1, A/H2, For On-Grid AC or Off-Grid Electric Water Heaters**

## Technical Data of CIM-1200A/H1, A/H2 (Rev 6.0 - July 2019)

DC Input (per Channel)	60 Cell Panel	72 Cell Panel
Supported Input Power	250W – 330W	250W – 380W
Operating Input DC Voltage Range	15V – 58V	20V – 58V
Peak Power Performance Range	30V – 58V	30V – 58V
Maximum Input DC Voltage / Current	58V / 10.5A	58V / 10.5A
Maximum Input Power	330W	330W
Minimum Starting Voltage	20V	20V
AC Output (per Inverter)	On-Grid, A Port	Off-Grid, H Port
Rated Output Power / Peak Output Power	960W / 1250W	960W / 1250W
Nominal Output Current (RMS)	4A	4A – 8A
Maximum Output Current (RMS)	6A	10.5A
Nominal Output Voltage / Range	240V (211V – 264V)	100V – 240V (10V – 264V)
Nominal Frequency / Range	60Hz (59.3 – 60.5) Hz	60Hz (59.5 – 60.5) Hz
Power Factor / Harmonic Distortion	>0.95 (THD < 4%, 2 <sup>nd</sup> Harmonic < 1%)	
Compatible Water Heaters or Heating Elements	2KW – 5KW, 240V Heating Elements for the Twin Pack	
Efficiency	Data	
Peak Efficiency / Solar MPPT Tracking	96% / 99%	
Mechanical Data	SI	U.S.
Ambient Temperature Range	-40°C to +65°C	-40°F to +149°F
Internal Operating Temperature Range	-40°C to +88°C	-40°F to +190°F
Dimensions w/o mounting bracket (L x H x W)	32cm x 24cm x 5.8cm	12.5" x 9.5" x 2.3"
Weight	6.5 kg	14.25 lbs
Cooling / Enclosure	Natural Convection, No Fan / Potted	
DC Wire / AC Wire	1-2 Feet DC Wires / 18 Feet AC Wires (THHN), Copper	
Compliance and Features	Data	
Safety and EMC Compliance	UL1741 and IEEE1547 (E113426), CSA 107.1, FCC Part 15 Class A.	
Rapid Shutdown	Complies with NEC 2014/2017 690.12.	
DC Ground Fault Detector Interrupter (GFDI)	Built-In	
Standard Warranty	3 Years (Extended Warranty Available)	
Enclosure Environmental Rating / Safety	Outdoor, NEMA 6 (IP67) / Transformer Isolated Circuits	



**Made in U.S.A.**