




## The World's First Dual-Output Off-Grid Solar Power Mini-Inverter



- Dual Output Ports
- Pure Sinewave AC Outputs
- Four DC Input Channels
- Solar or Battery Input for each Channel
- MPPT for Each Solar Panel
- Solar or Battery Auto-Detection
- Battery Over Discharge Protection
- High Efficiency and Long Life

Each CyboInverter (CIM-1200H/Te) can connect to 4 solar panels or a 48V battery, and generate up to 1150W AC to power heating elements via H port or produce 230V AC to run AC loads via T port.

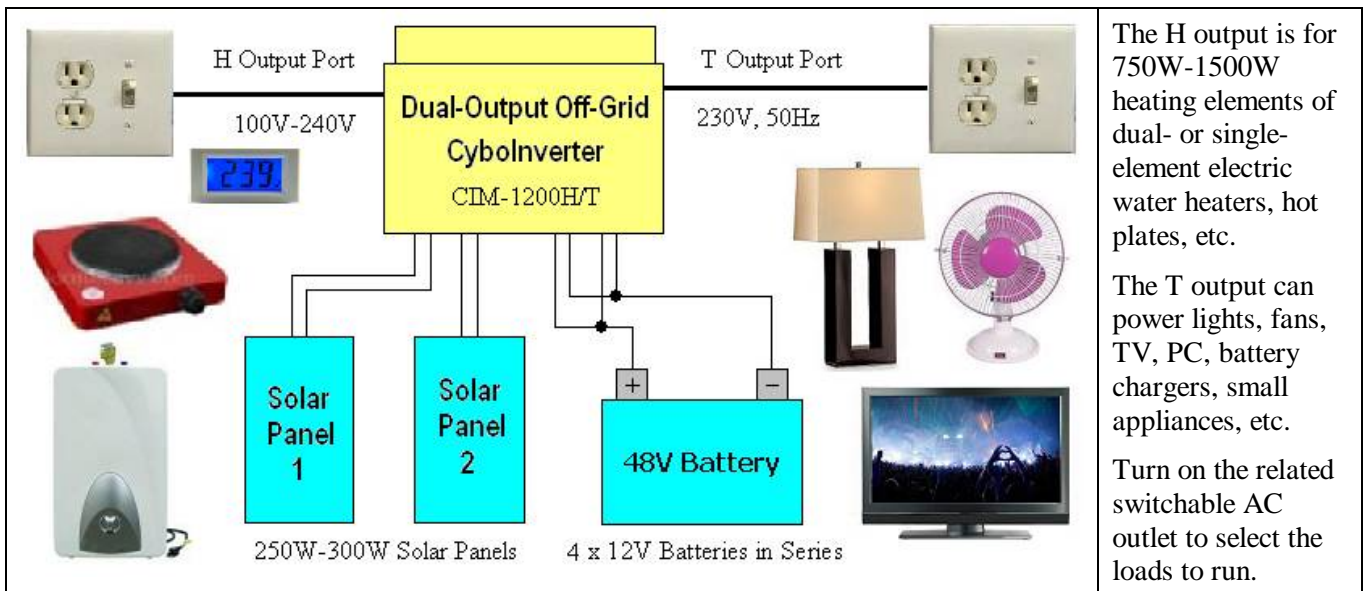

The H output is for 750W-1500W heating elements of dual- or single-element electric water heaters, hot plates, etc.


The T output can power lights, fans, TV, PC, battery chargers, small appliances, etc.

Turn on the related switchable AC outlet to select the loads to run.

**Product: 4 Channel 1.2KW Dual-Output Off-Grid CyboInverter for Microgrids**

**Part No: CIM-1200H/Te H Output Port: 100V-240V, T Output Port: 230V, 50Hz**

## Technical Data of CIM-1200H/Te (Rev 1.2 - May 2016)

<b>DC Input (per Channel)</b>	60 / 72 Cell Panel	Battery
Recommended Input Power	220W – 320W	48V, 50AH – 300AH
Operating Input DC Voltage Range	15V – 58V	47V – 58V
Peak Power Performance Range	30V – 58V	48V – 58V
Maximum Input DC Voltage / Current	58V / 9A	58V / 9A
Maximum Input Power	300W	300W
Minimum Starting Voltage	20V	47V
Compatible Solar Panels	Most 60-Cell and 72-Cell PV Solar Panels	
Compatible Batteries	48V Lead-Acid Deep-Cycle AGM or Lithium-Ion Pack	
<b>AC Output</b>	H Output Port	T Output Port
Rated Output Power / Peak Output Power	960W / 1150W	960W / 1150W
Nominal Output Current (RMS)	4A – 8A	4.17A
Maximum Output Current (RMS)	9.5A	5.6A
Nominal Output Voltage / Range	100V – 240V / (10V – 264V)	230V (207V – 253V)
Nominal Frequency / Range	50Hz (49.5 – 50.5) Hz	50Hz (49.5 – 50.5) Hz
Power Factor / Harmonic Distortion	>0.95 (THD < 4%, 2 <sup>nd</sup> Harmonic < 1%)	
<b>Efficiency</b>	Data	
Peak Efficiency / Solar MPPT Tracking	96% / 99%	
<b>Mechanical Data</b>	SI	U.S.
Ambient Temperature Range	-40°C to +65°C	-40°F to +149°F
Internal Operating Temperature Range	-40°C to +88°C	-40°F to +190°F
Dimensions w/o mounting bracket (L x H x W)	32cm x 24cm x 5.8cm	12.5" x 9.5" x 2.3"
Weight	6.5 kg	14.25 lbs
Cooling / Enclosure	Natural Convection, No Fan / Potted	
DC Connectors / AC Connectors	MC-4 or Compatible / Wieland RST 3-Conductor	
<b>Compliance and Features</b>	Data	
Safety and EMC Compliance	UL1741 and IEEE1547 (E113426), FCC Part 15 Class A	
DC Ground Fault Detector Interrupter (GFDI)	Built-In	
Standard Warranty	3 Years (Extended Warranty Available)	
Enclosure Environmental Rating / Safety	Outdoor, NEMA 6 (IP67) / Transformer Isolated Circuits	
Built-in Battery Over Discharge Protection	Low Voltage Disconnect (LVD) on Battery Channels.	

**Made in U.S.A.**